

ReSound AZURE

Product information

AZ20 MC




Product Description

ReSound Azure AZ20 is part of a complete family of highly advanced hearing aids implementing the latest advances in innovation and hearing science.

ReSound Azure is the first in a new generation of hearing aids designed to provide the auditory system with the best possible conditions and support to ensure optimal audibility and comfort in all environments.

Fitting Range

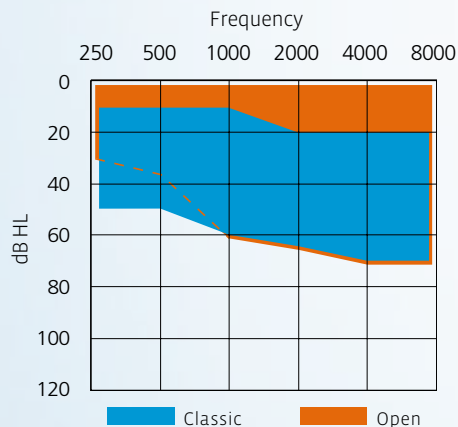

Key Features

- MiniCanal
- 17-band Warp™ Sound Processing (9 gain handles)
- Environmental Optimizer™
- Environmental Learner™ (for Volume Control only)
- NoiseTracker™ II Noise Reduction
- EchoStop™
- Impulse Noise Smoother
- Acceptance Manager
- Dual Stabilizer™ II DFS Feedback Cancellation
- Open fitting capabilities
- Onboard Analyzer™ II DataLogging
- SmartStart™
- Acoustic Indicator for Programme Selection
- Acoustic Indicator for Volume Control
- Low Battery Warning Indicator
- Low Battery Consumption Chip Technology
- Up to 4 Customisable Programmes

Standard Configuration

- Size 10A battery
- Push button (Optional)
- Programmable Volume Control (Optional)
- Available in 3 colours
- Supports StepVent

Fitting Requirements

- Aventa fitting software (2.4 or higher)
- CS63 FlexStrip cable (3-pin)
- Speedlink™, HI-PRO or NOAHlink interface (Speedlink recommended)

AZ20 MC






Technical Specifications

IEC 60118-0
IEC 711
Ear Simulator

IEC 60118-7
2cc Coupler

Reference Test Gain (60 dB SPL Input)	1600 Hz / HFA	25 dB	24 dB
Full-On Gain (50 dB SPL Input)	Max	41 dB	31 dB
	1600 Hz / HFA	35 dB	28 dB
Maximum Output (90 dB SPL Input)	Max	118 dB SPL	108 dB SPL
	1600 Hz / HFA	112 dB SPL	106 dB SPL
Total Harmonic Distortion	800 Hz	0.8 %	0.5 %
	1600 Hz	0.5 %	0.4 %
Equivalent Input Noise, w/o Noise reduction		24 dB SPL	24 dB SPL
1/3 Octave E.I.N. at 1600 Hz, w/o Noise reduction		11 dB SPL	
Frequency Range (DIN 45605)		100-5880 Hz	100-5740 Hz
Current Drain		0.85 mA	0.87 mA
Typical Battery Life Time (Battery type 10A)		106 hrs	103 hrs

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3 V.

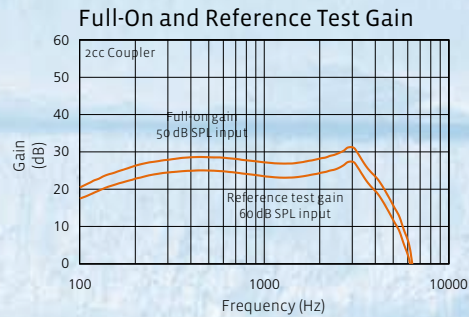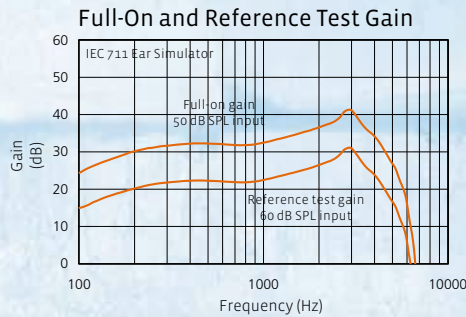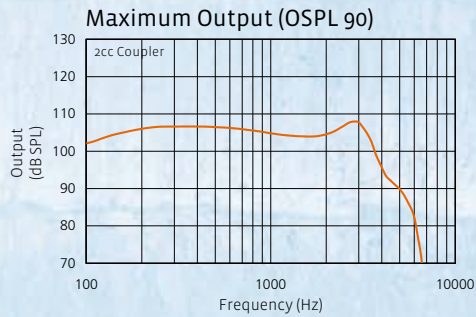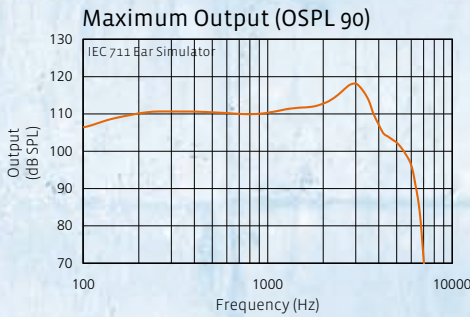

Full/On Gain Parameter Settings*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	25	25	25	25	25	25	25	25	25
G[50]	34	34	34	34	34	34	34	34	34

Reference Test Gain Parameter Settings for 118-0*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	18	18	18	18	18	18	18	18	18
G[50]	27	27	27	27	27	27	27	27	27

Reference Test Gain Parameter Settings for ANSI and 118-7*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	24	24	24	24	24	24	24	24	24
G[50]	33	33	33	33	33	33	33	33	33

*Settings in accordance with Aventa fitting software